


Smart switch

NS-SZPS SERIES / 1-4 GANG

Physical push-button lighting control with NETUS app connectivity.


NS-SZPS-1


1 gang


NS-SZPS-2

2 gang


NS-SZPS-3

3 gang


NS-SZPS-4

4 gang

MANUAL + APP

On/off control and status

SCHEDULES

Timers and daily routines


MULTIWAY ASSOCIATION

2-way / 3-way switching

TECHNICAL SPECIFICATIONS

Supply	110-240 V AC, 50/60 Hz
Wireless / gateway	Compatible NETUS gateway required for app control
Switching / material	Relay on/off; physical push buttons; PC housing
Maximum load ratings	LED 300 W/gang; incandescent 700 W/gang; 16 A max
Dimensions, portrait	74 W x 118 H mm; 10 mm face + 25 mm rear
Variants	1 / 2 / 3 / 4 gang
Control features	NETUS app on/off and status; schedules, countdown and delay-off; multiway association control; indicator and power-restoration settings (firmware dependent).

DIMENSIONS

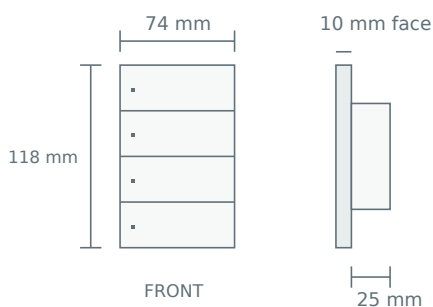

ACCESSORIES



NS-SMG6 gateway

Required for app control, schedules and multi-control association. Supplied separately.

